





2 100

1		1:1 1:1 1435mm 800mm	1
2			1

		1 1.1 1300mm 1500 1800mm 2000 DC110v -30% +25% 3 0.50s 3 0.50s 2.5 4.0s 300N 200 300 150N 25 60mm 0.3 1.6 70dB Rw 31dB A K 4.6W/(m2K) EN50155 -25 +40 / ATO 1.2 / 2 2.1 1	
--	--	--	--

		2 3 4 5 6 7 8 2.2 CPU Intel J1900 2G DDR3 32G 2 1 HDMI 1 VGA,1 DVI 1 MIC 1 Speaker I/O: 2 LAN 2 COM ,1 LPT 1 PS2 6 USB2.0,1 DIO 2.3 21 1920 1080 250cd/m	
3		ADD ADD 1 1 310mm 150mm 1950mm 2550mm 1550 5mm 2580mm 1680A 70s 5s 3500A 30s 1600A DC 1000V 540A 100N 70N 140N 90km/h 140kg 550kPa 400kPa 900kPa 8s 8s	1

		RAL3020 2 2 1550mm 5mm 300mm 3mm 3 800mm 1mm 60mm 4 3kV 80mm 5 Rc3/8 2 1 2 3 4 5 6 7 (U)	
4		TCMS	1

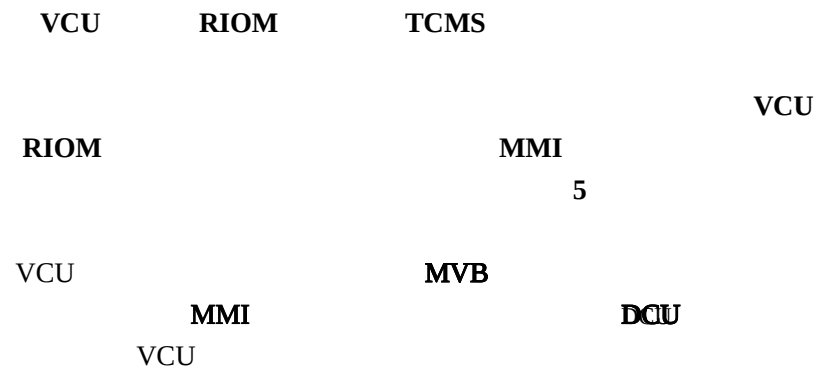

		/ :-10-+60 (-4-140)/20-80%() 5. 365×96.2×252mm	
7		1. 1 GB 2 PVC 3 4 AC380V 5 6mm ² AC220V 5 6mm ² 1 1 2. 1 2 10 3 4000K-6000K 4 AC220V/50Hz 3 : 1 2 3% 3 4 1 160m 2 3 5 1 153m 2 0.8mm 3 600X600	1
8		1 3.0mm 1mm 85 : 1200mm*2400mm 80cm 2 /UV 30*10cm + 3 5mmPVC + 60*80cm	1